BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE

Name of Work: Estimate for Pot holes Filling in Ward No. 10 (Doddabommasandra), Vidyaranyapura Sub Division.

							Estimate Cost Rs.		500000.00
Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB M400-17: Providing, laying spreading and compacting graded stones aggregate to **wet mix macadam** specifications including premixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying, in uniform layers with paver in sub base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per MORTH specification NO. 406, **Page No. 157 / Item No. 20.18 / PWD SR 2015-16**	Cum							
	Road Cut Portion and Depression Filling								
			15	1.30	1.50	0.15	4.39		
			22	1.40	1.40	0.15	6.47		
			26	1.30	1.60	0.15	8.11		
			25	1.30	1.60	0.15	7.80		
			26	5.20	2.00	0.15	40.56		
			30	3.50	1.50	0.15	23.63		
			20	4.30	2.10	0.15	27.09		
							118.04	1713.96	**202320.00**
	Basic Rate	1587.00							
	Area Weightage @ 8%	126.96							
	Total	**1713.96**							
2	KSRRB 3000: **Filling Pot-holes and patch repairs with bituminous concrete, 40 mm,** KSRRB M3000-5, Removal of all failed material, trimming of completed excavation to provide firm vertical faces, cleaning of surface, painting of tack coat on the sides and base of excavation as per clause 500.3 back filling the pot hole with bituminous material as per clause 500.4 compacting, trimming and finishing the surface to form a smooth continuous surface, all as per clause 3004.2 complete as per specifications, MORTH specification No. 3004.2, **No. 250 / Item No. 35.5 / PWD SR 2015-16**	Sqm							
			15	1.30	1.50		29.25		
			22	1.40	1.40		43.12		
			26	1.30	1.60		54.08		

Sl No	Description of item	Unit	No	L	B	D	Qty	Rate	Amount
			25	1.30	1.60		52.00		
			26	5.20	2.00		270.40		
			30	3.50	1.50		157.50		
			20	4.30	2.10		180.60		
							786.95	370.44	**291518.00**
	Basic Rate	343.00							
	Area Weightage @ 8%	27.44							
	Total	**370.44**							
3	Total								**493838.00**
4	Thirty Party Inspection Charges @ 1%								**4938.00**
5	Miscellaneous and unforeseen charges								**1224.00**
								Total	**500000.00**

(Rupees Five Lakhs Only)

CERTIFICATE:

1 The work spot has been inspected and the work is found necessary.
2 This estimate is prepared as per P.W.D S.R of 2015-16.
3 This work included under 2015-16 POW Grant.
4 The provisions were made in this estimate are necessary and adequate.
5 This works come under B.B.M.P. limits.

Executive Engineer
Byatarayanapura Division
Yelahanka Zone, B.B.M.P.
Bangalore - 560 092
14/12/15

Assistant Engineer
Ward NO. 10

Assistant Executive Engineer
Bruhat Bangalore Mahanagara Palike
Vidyaranyapura Sub Division

Executive Engineer
Bruhat Bangalore Mahanagara Palike
Byatarayanapura Division

ADMINISTRATIVE APPROVAL
Accorded For Rs. Five lakhs only
Head of A/c P-1771
Div. Ref. No. 197 Date 14.12.15
AE
EE(BTP) 14/12

TECHNICAL SANCTION
Accorded For Rs. Five lakhs only
Head of A/c P-1771
Div. Ref. No. 206 Date 14.12.15
AE
EE(BTP) 14/12

BRUHAT BANGALORE MAHANAGARA PALIKE

YELAHANKA ZONE, BYATARAYANAPURA DIVISION

Lead Statement for Srinivaspura Dumping Yard for Ward No. 10, Vidyaranyapura Sub Division.

Lead Distance

1.	From BBMP Sub Division office to Devi Circle	1.50 Kms
2.	From Devi Circle to Thirumala Daba	2.00 Kms
3.	From Thirumala Daba to 3rd Cross SBI Bank	2.00 Kms
4.	From 3rd Cross SBI Bank to Sheshadripuram College	0.50 Kms
5.	From Shesadripuram College to Police Station	0.80 Kms
6.	From Police Station to Kogilu Cross	0.60 Kms
7.	From Kogilu Cross to Srinivasapura	4.00 Kms
8.	From Srinivasapura to Dumping Yard	0.50 Kms
	Total	**11.90 Kms**

Certificate:

1. Certified that the Srinivasapura Dumping Yard us the approved dumping yard for ward no. 10 BBMP
2. BBMP Sub Division office Vidyaranyapura is taken as the centre place for calculating the lead distance for ward no. 10.
3. The above distance is the shortest distance for calculating the lead.

Assistant Engineer
Ward No. 10

Assistant Executive Engineer
Vidyaranyapura Sub Division

LEAD CHART FOR DUMPING YARD FOR WARD NO

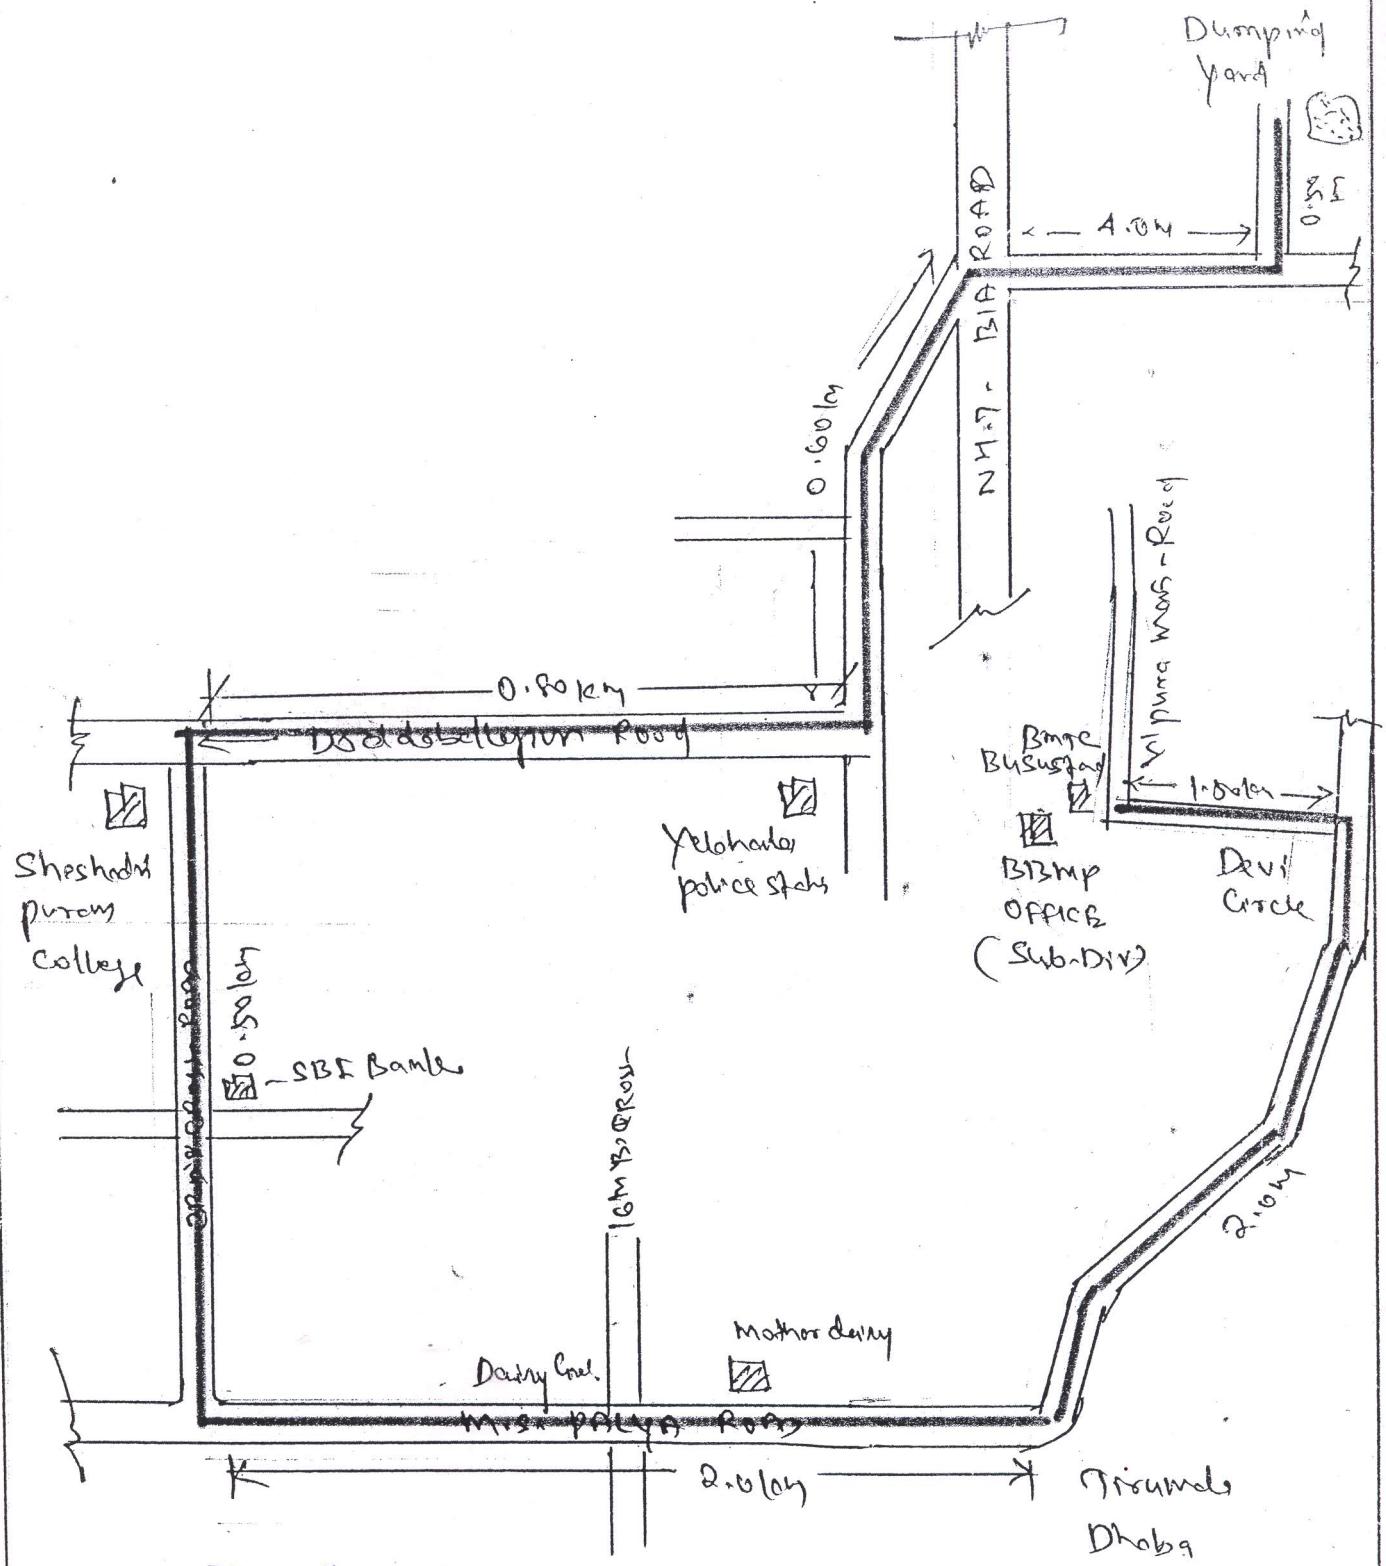

Jadhao
AE

ಸಹಾಯಕ ಕಾರ್ಯ ಪಾಲಕ ಅಭಿಯಂತರರು.
ವಿದ್ಯಾರಣ್ಯಪುರ ಉಪ ವಿಭಾಗ.
ಯಲಹಂಕ ವಲಯ.
ಬೃ. ಬೆಂ. ಮ. ಪಾ., ಬೆಂಗಳೂರು-97